


Part number: **I45000070** Model: **SI4-DC1.5 NPN NO H1**



Dimension in mm

### 1. TECHNICAL CHARACTERISTICS

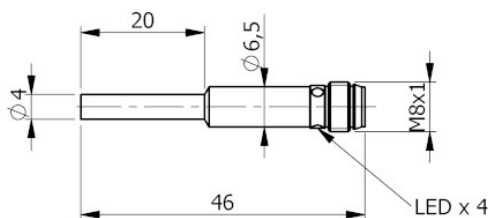

#### Electrical data

Power supply type:		Direct current
Working voltage:	[V]	10 ÷ 30
Current consumption:	[mA]	< 10 mA @ 24Vdc
Protection class:		III
Reverse polarity protection:		Presente

#### Outputs

Electrical design:		NPN
Function:		NO
Max voltage drop:	[V]	< 1.4
Max output current:	[mA]	100
Max switching frequency:	[Hz]	2000
Short circuit protection:		Present
Overload protection:		Present

#### Detection zone

Switching distance-Sn:	[mm]	1.5
Real sensing distance-Sr:	[mm]	1.5 ±10%
Operative distance-So:	[mm]	0 ÷ 1.22
Extended sensing distance:		Si

#### Accuracy and Deviations

Correction factor:		Stainless steel: 0.9 - Brass: 0.5 - Aluminium: 0.4 - Copper: 0.4
Hysteresis:	[%Sr]	< 10
Switching point drift:	[%Sr]	-1
Repeatability:	[%Sn]	< 3

#### Environmental conditions

Temperature limits:	[°C]	-25/+70
IP rating:		IP65-IP66-IP67 (depending on connector )

### Display and control elements

Display:	Output switching status - 4 x 90° LED: Yellow
----------	---

### Mechanical data

Housing:	Smooth cylindrical
Dimensions:	[mm] $\varnothing 4 - L=46$
Materials:	Housing: AISI 303 - Sensing area: POM black
Mounting:	Embeddable
Weight:	[g] 20

### Electrical connection


Connector:	H1 type - M8X1 - gold plated contacts
------------	---------------------------------------

### Compliance to Standards / Directives

Directives compliance:	2014/30/EU -Electromagnetic compatibility directive (EMC)
Standards compliance:	EN60947-5-2 - Product standard

## 2. NORME DI INSTALLAZIONE

### WIRING DIAGRAM

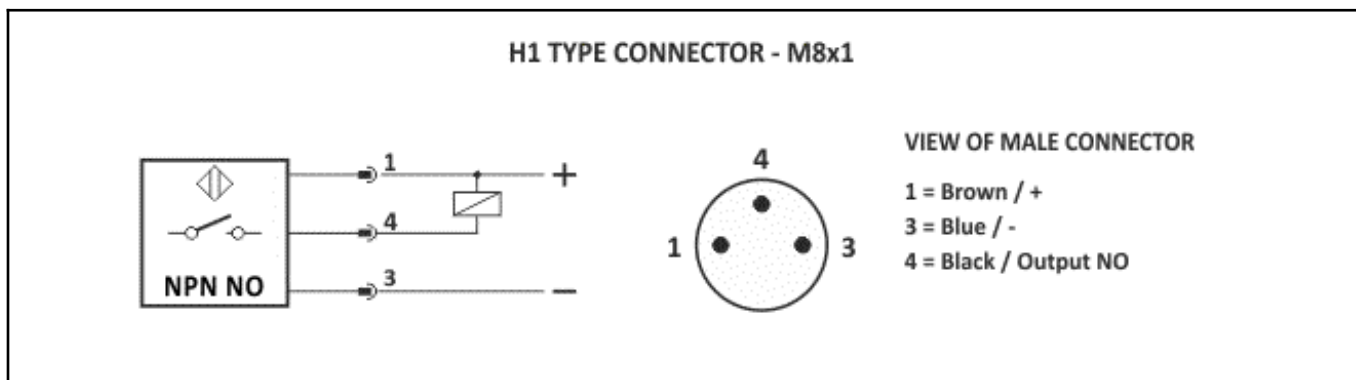

### INSTRUCTIONS FOR CORRECT INSTALLATION

